


ProfileMaster is equipped with a unique coolant and chip removal system.

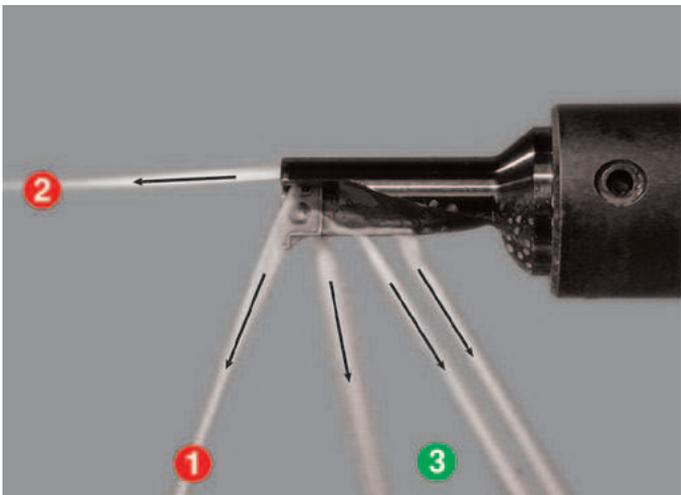

1

Cooling of the inserts

2

General coolant stream

3

Chipbooster prevents chips from getting stuck between tool and work piece



In order to guarantee efficient chip evacuation from a hole, a minimum coolant pressure of 3 - 6 bar (optimum 7 - 10 bar) is required.