


Спеченные стержни

Для обработки прессформ и сверхтвердых материалов

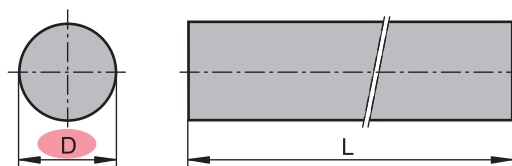

D мм	Тип, обозначение	L мм	Допуск мм	TSF22	TSF44				
2,20	RR 0220-330	330	-0/+0.20		○				
3,25	RR 0325-330	330	-0/+0.10	●	●				
4,20	RR 0420-330	330	-0/+0.20		●				
5,20	RR 0520-330	330	-0/+0.25	○	●				
6,20	RR 0620-330	330	-0/+0.25	●	●				
6,70	RR 0670-330	330	-0/+0.25		○				
8,20	RR 0820-330	330	-0/+0.30	●	●				
10,20	RR 1020-330	330	-0/+0.30	●	●				
11,20	RR 1120-330	330	-0/+0.30		○				
12,20	RR 1220-330	330	-0/+0.30	●	●				
14,20	RR 1420-330	330	-0/+0.30	○	●				
16,20	RR 1620-330	330	-0/+0.45	●	●				
18,20	RR 1820-330	330	-0/+0.45	○	●				
20,20	RR 2020-330	330	-0/+0.45	●	●				
25,20	RR 2520-330	330	-0/+0.65	●	▲				
32,20	RR 3220-330	330	-0/+0.65		○				

- = в наличии на складе
 - = ограниченный склад или по запросу
 - ▲ = новые изделия
- Другие классы и размеры по запросу