
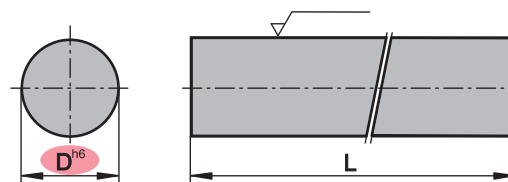


Шлифованные стержни

Ø 16,00 - 40,00 mm

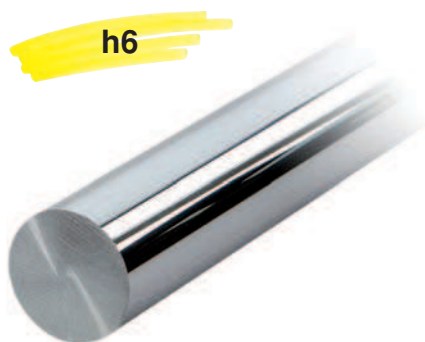

D mm	Тип, обозначение	L mm	Допуск mm	MG12	CTF12A	TSM20	TSM33	MG18	CTS18D
16,00	RG 1600-325	325	+0/-0.011	○				●	
16,00	RG 1600-330	330	+0/-0.011		○	●	●		●
18,00	RG 1800-325	325	+0/-0.011					○	
18,00	RG 1800-330	330	+0/-0.011		○	○	●		
19,00	RG 1900-330	330	+0/-0.013				○		
20,00	RG 2000-325	325	+0/-0.013	○				●	
20,00	RG 2000-330	330	+0/-0.013		○	●	●		●
22,00	RG 2200-330	330	+0/-0.013				●		
24,00	RG 2400-330	330	+0/-0.013				○		
25,00	RG 2500-325	325	+0/-0.013					●	
25,00	RG 2500-330	330	+0/-0.013				●		○
26,00	RG 2600-330	330	+0/-0.013				○		
28,00	RG 2800-330	330	+0/-0.013				○		
30,00	RG 3000-330	330	+0/-0.013				●		
32,00	RG 3200-330	330	+0/-0.016				●		○
38,00	RG 3800-330	330	+0/-0.016				○		
40,00	RG 4000-330	330	+0/-0.016				▲		

● = в наличии на складе

○ = ограниченный склад или по запросу

▲ = новые изделия

Другие классы и размеры по запросу