
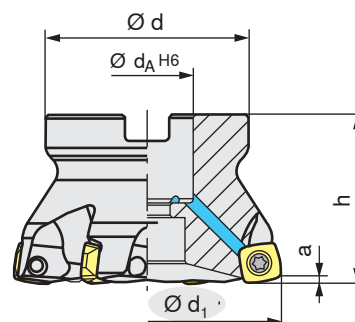


MaxiMill HFC system

AHFC-09/-12

B84



d ₁ [mm]	Type, description	h [mm]	d [mm]	d _A [mm]	a [mm]	z	n _{max} [min ⁻¹]	[Nm]		
32	AHFC.32.R.03-09	40	38	16	1	3	27000	3.2	XD.. 09..	E01
35	AHFC.35.R.04-09	40	38	16	1	4	26700	3.2	XD.. 09..	E01
40	AHFC.40.R.04-09	40	38	16	1	4	26400	3.2	XD.. 09..	E01
42	AHFC.42.R.05-09	40	38	16	1	5	26100	3.2	XD.. 09..	E01
50	AHFC.50.R.05-09	40	43	22	1	5	23500	3.2	XD.. 09..	E02
52	AHFC.52.R.06-09	40	43	22	1	6	23000	3.2	XD.. 09..	E02
63	AHFC.63.R.06-09	40	48	22	1	6	20500	3.2	XD.. 09..	E02
66	AHFC.66.R.07-09	40	48	22	1	7	20000	3.2	XD.. 09..	E02
40	AHFC.40.R.03-12	40	38	16	2	3	21120	5	XO.. 12..	E03
42	AHFC.42.R.04-12	40	38	16	2	4	20880	5	XO.. 12..	E03
50	AHFC.50.R.04-12	40	43	22	2	4	18800	5	XO.. 12..	E04
52	AHFC.52.R.05-12	40	43	22	2	5	18400	5	XO.. 12..	E04
63	AHFC.63.R.05-12	40	48	22	2	5	16400	5	XO.. 12..	E04
66	AHFC.66.R.06-12	40	48	22	2	6	16000	5	XO.. 12..	E04
80	AHFC.80.R.07-12	50	58	27	2	7	14000	5	XO.. 12..	E04
100	AHFC.100.R.08-12	50	78	32	2	8	12000	5	XO.. 12..	E04

					
E01	11036880	165795	11149570	8095010500	4425
E02		165795	11149570	8095010500	
E03	11036880	106022	11210490	8095010600	4425
E04		106022	11210490	8095010600	

