
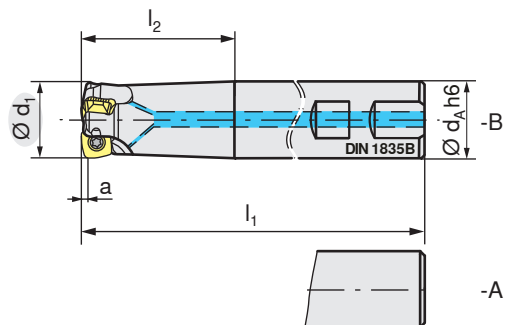



MaxiMill HFC system

CHFC-06/-09/-12

B85



d ₁ [mm]	Type, description	l ₁ [mm]	l ₂ [mm]	d _A [mm]	a [mm]	z	n _{max} [min ⁻¹]	[Nm]		
16	CHFC.16.R.02-06-A-40-200	200	40	16	0.8	2	4600	1.2	XP.. 06..	E01
16	CHFC.16.R.02-06-B-40	89	40	16	0.8	2	17300	1.2	XP.. 06..	E01
20	CHFC.20.R.03-06-A-50-225	225	50	20	0.8	3	4200	1.2	XP.. 06..	E01
20	CHFC.20.R.03-06-B-50	101	50	20	0.8	3	14500	1.2	XP.. 06..	E01
25	CHFC.25.R.04-06-A-50-225	225	50	25	0.8	4	4600	1.2	XP.. 06..	E01
25	CHFC.25.R.04-06-B-50	107	50	25	0.8	4	15600	1.2	XP.. 06..	E01
32	CHFC.32.R.05-06-A25-60-225	225	60	25	0.8	5	3900	1.2	XP.. 06..	E01
32	CHFC.32.R.05-06-B25-60	117	60	25	0.8	5	11000	1.2	XP.. 06..	E01
25	CHFC.25.R.02-09-A-50-225	225	50	25	1	2	9000	3.2	XD.. 09..	E02
25	CHFC.25.R.03-09-A-50-225	225	50	25	1	3	9000	3.2	XD.. 09..	E02
32	CHFC.32.R.03-09-A-63-250	250	63	32	1	3	8100	3.2	XD.. 09..	E03
32	CHFC.32.R.02-12-A-63-250	250	63	32	2	2	6480	5	XO.. 12..	E04
35	CHFC.35.R.03-12-A-63-250	250	63	32	2	3	6480	5	XO.. 12..	E04

E01	76913	11149541	8095010200
E02	54976	11149570	8095010500
E03	165795	11149570	8095010500
E04	106022	11210490	8095010600



B276